


Product Description	Technical Features	Operating Range	Material
---------------------	--------------------	-----------------	----------

<ul style="list-style-type: none"> <li>▶ 1,1-Seal face</li> <li>▶ 1,2-O-Ring (For rotary seal)</li> <li>▶ 1,3-Housing</li> <li>▶ 1,4-Spring</li> <li>▶ 1,5-Set screws</li> <li>▶ 1,6-Drive collar</li> </ul>	<ul style="list-style-type: none"> <li>▶ Single Seal</li> <li>▶ Unbalanced</li> <li>▶ Independent of rotation direction</li> </ul>	<ul style="list-style-type: none"> <li>▶ <math>d_1 = 18 - 65\text{mm}</math></li> <li>▶ <math>p = 10 \text{ bar}</math></li> <li>▶ <math>t = -20 / 220 \text{ }^\circ\text{C}</math></li> <li>▶ <math>V_g = 20 \text{ m/sn}</math></li> </ul>	<ul style="list-style-type: none"> <li>▶ Rotary seal faces: Carbon,</li> <li>▶ Stationary seal faces: Chromuim Nickle 316 ti Silicon carbide, Ceramic, Tungsten Carbide,</li> <li>▶ Elastomers : Viton (FKM), EPDM,</li> </ul>
--	--	---	--

**Stationary Seat Alternatives**

- ▶ G-4 G-9

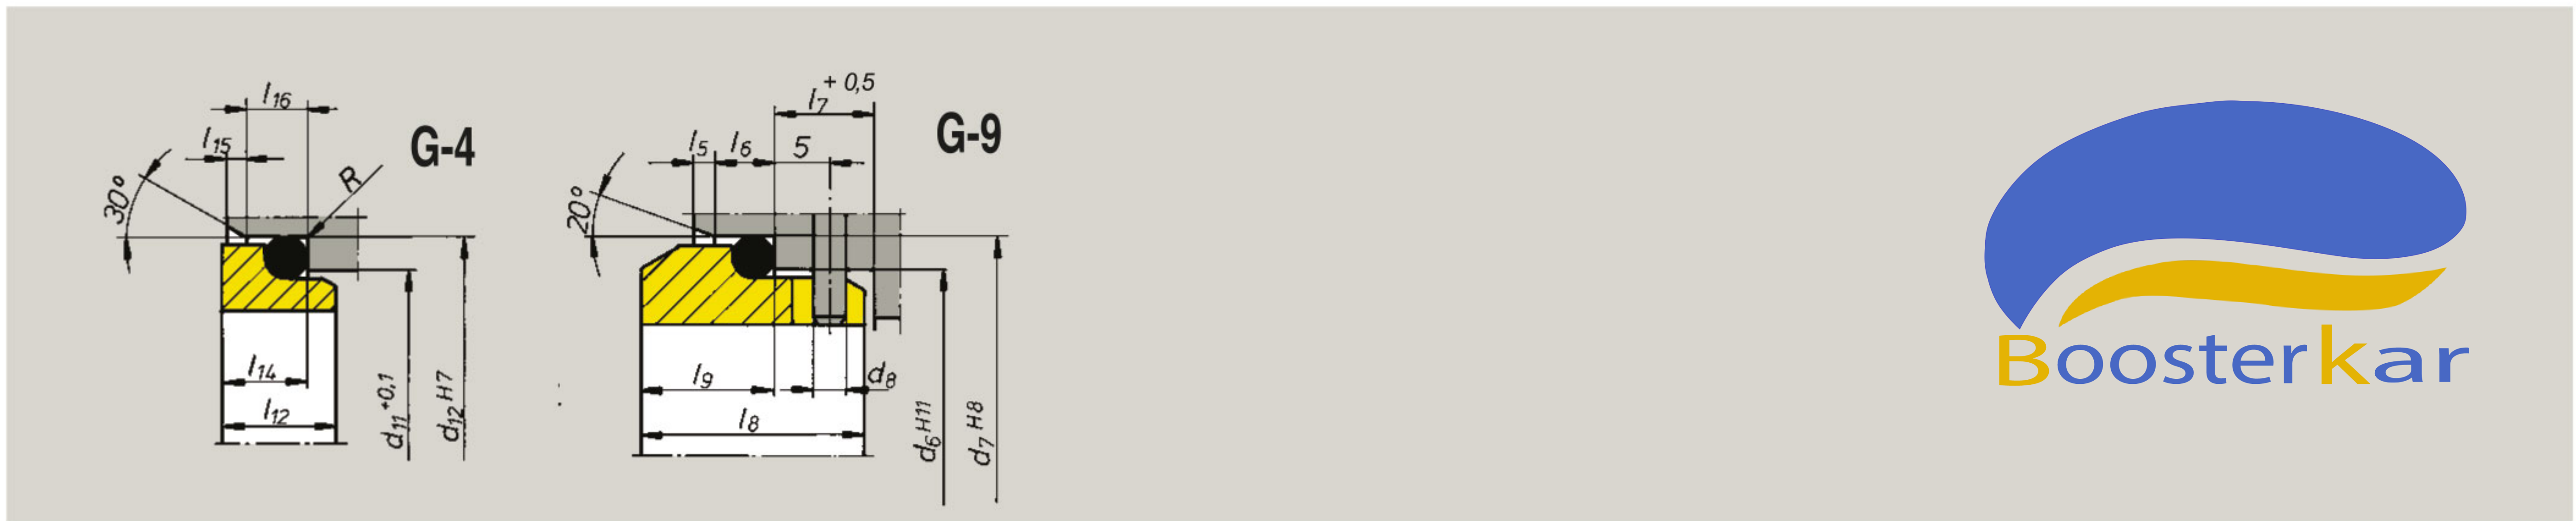

d	D1	L	F	D2	D3	d	D1	L	F	D2	D3
18	36	43	6.0	24.0	30.0	40	62	55,3	7,5	52,2	58.0
20	38	43	6.0	29,5	35.0	42	64	62,3	7,5	53,3	62.0
22	40	43	6.0	29,5	35.0	45	67	62,3	8.0	55,3	64.0
24	42	43	6.0	32.0	38.0	48	69	65,3	8.0	59,7	68,4
25	43	43	6.0	32.0	38.0	50	72	69,3	8.0	60,8	69,3
28	46	45	7.0	36.0	42.0	55	77	70,3	8.0	66,5	75,4
30	48	47	7.0	39,2	45.0	58	80	72,3	8.0	69,5	78,4
32	50	49	7,5	42,2	48.0	60	82	74,3	8.0	71,5	80,4
35	53	49,5	7,5	46,2	52.0	65	90	76,3	9.0	76,5	85,4
38	59	55,3	7,5	49,2	55.0						